

FLOOD LIGHT

DR-TG-008-150W

REV:A / 0

ATTENTION



OBSERVE PRECAUTIONS
FOR HANDLING
ELECTROSTATIC
DISCHARGE
SENSITIVE
DEVICES

DR-TG-008-150W



Feature

Size : 375 x 310 x 187 mm

Input:100 ~ 240V AC

Rated Power:150W

Working Current: 1.36~0.68A

LED Q'ty:150pcs

Aluminum LED+ Glass lens

Features ;quick response ,start with no flicker ,radiation , green energy

Dimension:



375x 310 x 187 mm

FLOOD LIGHT


DR-TG-008-150W

REV:A / 0

Largest center illumination

Height	2m	4m	6m	8m
Lux (130 °)	14652	3687	1356	539

130°

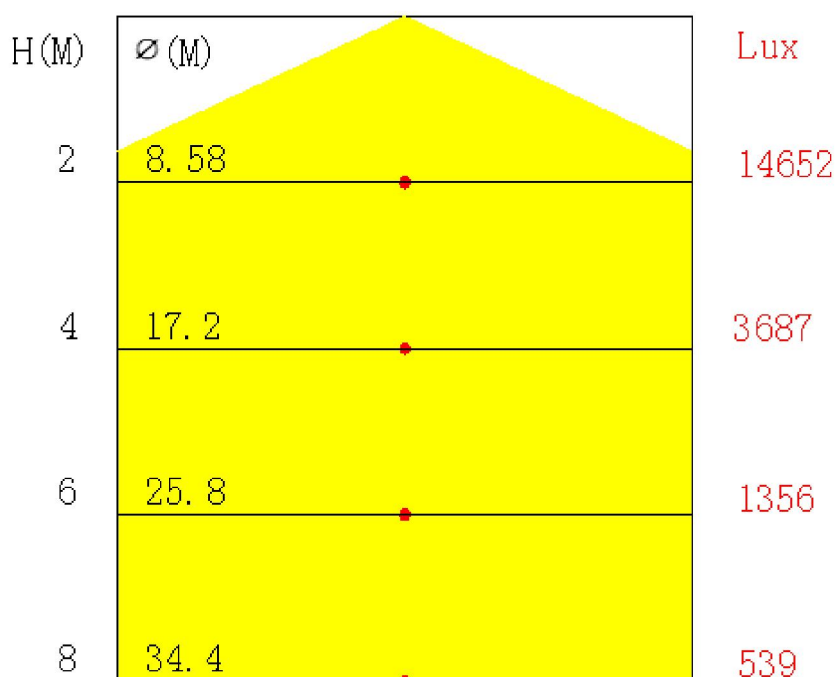

Absolute maximum rating at TA=25

Working current	1.36~0.68A	A
Input voltage(AC)	100-240	V
Power	150	W
Luminous flux	>12000	Lm
Color temperature	5500-6500	K
CRI	>70	Ra
Waterproof grade	IP65	
Working temperature	-20 ~ +45	
Storage temperature	-20 ~ +45	

FLOOD LIGHT

DR-TG-008-150W

REV:A / 0

Packing



Size : 48.5 x 43 x 60 cm 0.13M³

N.W : 14.4KG



G.W : 20.1KG



1PCS

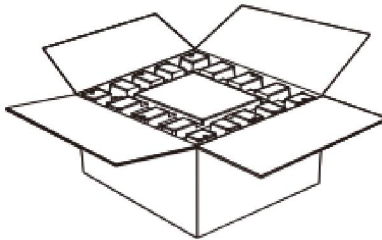

1 PCS



2 PCS/Carton